



TILTING DISC CHECK VALVE DN200-DN1200

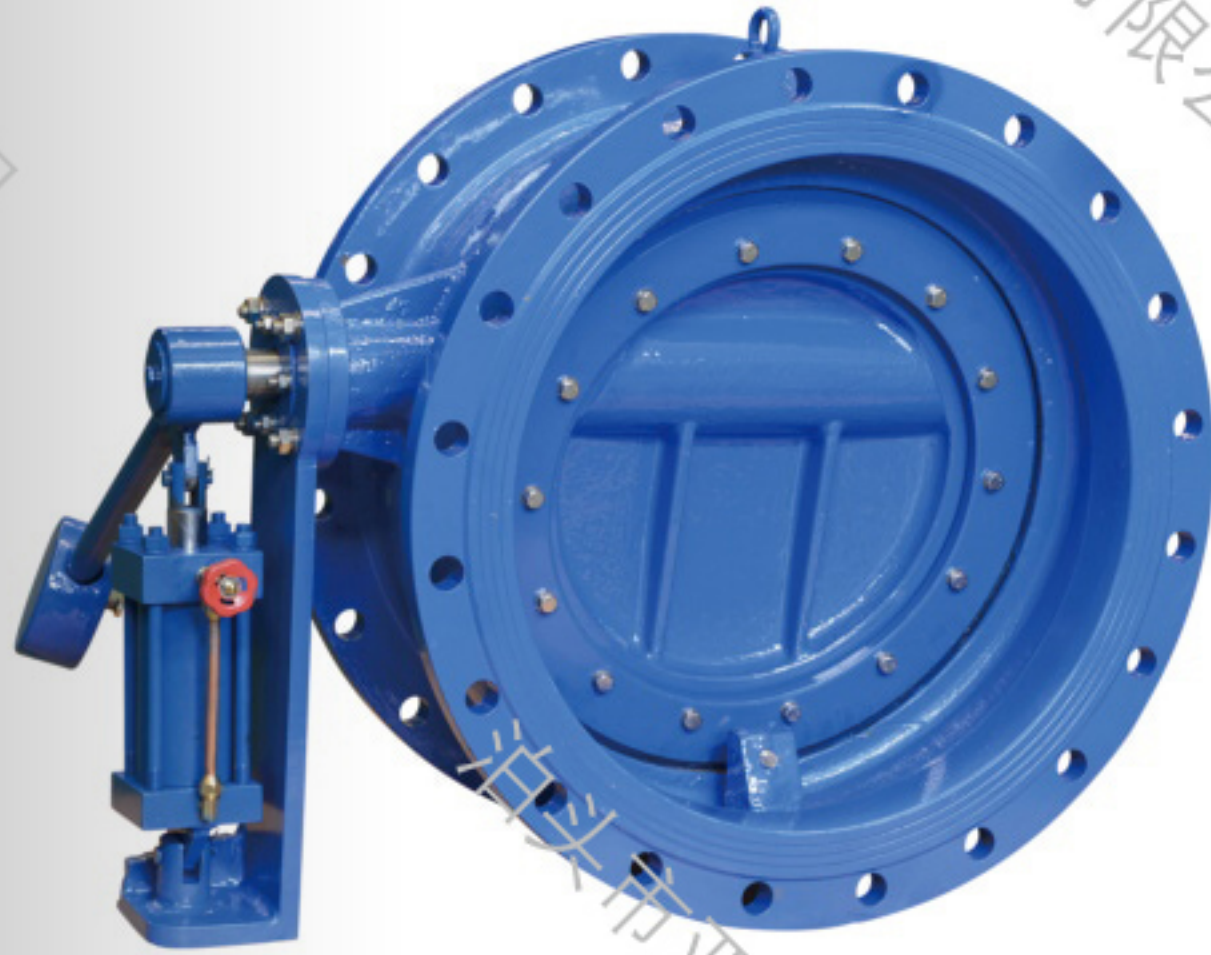

Part & Materials		
NO	Part	Material
1	Body	Ductile Iron GGG50
2	Retainer Ring	Q235
3	Disc	Ductile Iron GGG50+NBR
4	Counter Weight	Cast Iron GG25
5	Shaft	SS410
6	Hydraulic Damper	-
7	Needle Valve	Brass
8	Shaft Bearing	Brass
9	Shaft Bearing	Brass
10	Bolts	Stainless Steel
11	Plate	Carbon Steel

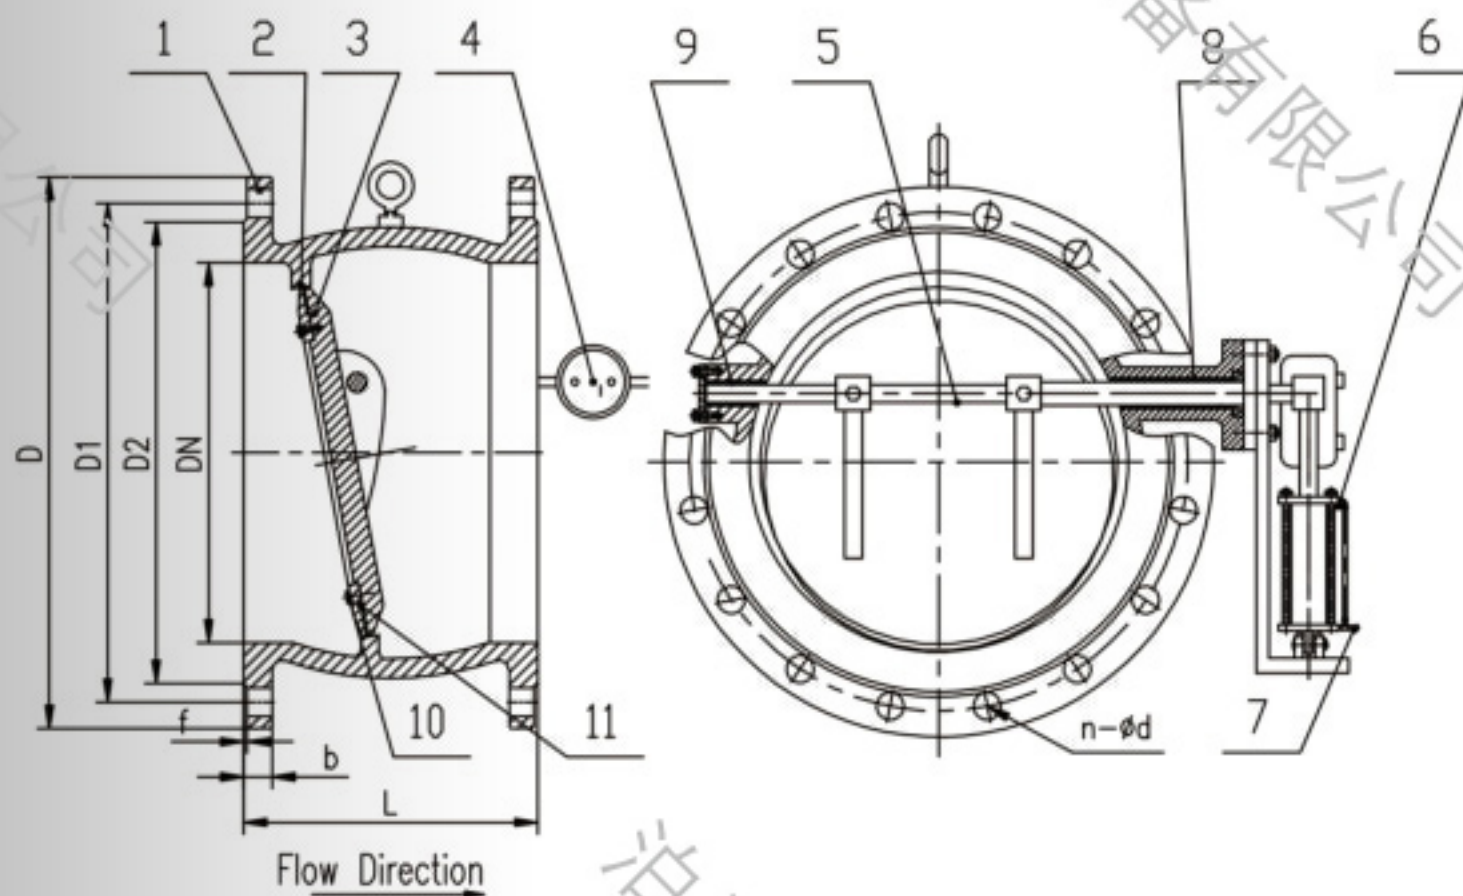

Technical Data		
NO	Description	Specification
1	Nominal Dia	DN200-DN1200
2	Nominal Pressure	PN10&PN16
3	Face to Face Standard	EN558&ISO5752 Series-14
4	Flange Standard Conformity	EN1092-2
5	Expoxy Coating	Epoxy powder coating with minimum thickness of 250 microns inside and outside.
6	Working Temperature(Max)	80°C

DIMENSIONS (MM)

DN	L	D		D1		D2		b		f		n-d	
		PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16
DN200	230	340	340	295	295	266	266	24	24	2	2	8-22	12-22
DN250	250	395	405	350	355	319	319	26	26	2	2	12-22	12-26
DN300	270	445	460	400	410	370	370	26	28	2	2	12-22	12-26
DN350	290	505	520	460	470	429	429	26	30	2	2	16-22	16-26
DN400	310	565	580	515	525	480	480	26	32	2	2	16-26	16-30
DN450	330	615	640	565	585	530	548	28	34	2	2	20-26	20-30
DN500	350	670	715	620	650	582	609	28	34	2	2	20-26	20-33
DN600	390	780	840	725	770	682	720	28	36	2	2	20-30	20-36
DN700	430	895	910	840	840	794	794	34	40	5	5	24-30	24-36
DN800	470	1015	1025	950	950	901	901	36	42	5	5	24-33	24-39
DN900	510	1115	1125	1050	1050	1001	1001	38	44	5	5	28-33	28-39
DN1000	550	1230	1255	1160	1170	1112	1112	38	46	5	5	28-36	28-42
DN1200	630	1455	1485	1380	1390	1328	1328	44	52	5	5	32-39	32-48

Yaxing product specifications in this catalog are for reference only. Yaxing reserves the rights to change without prior notice.