


DOUBLE ORIFICE AIR VALVE DN40-DN200

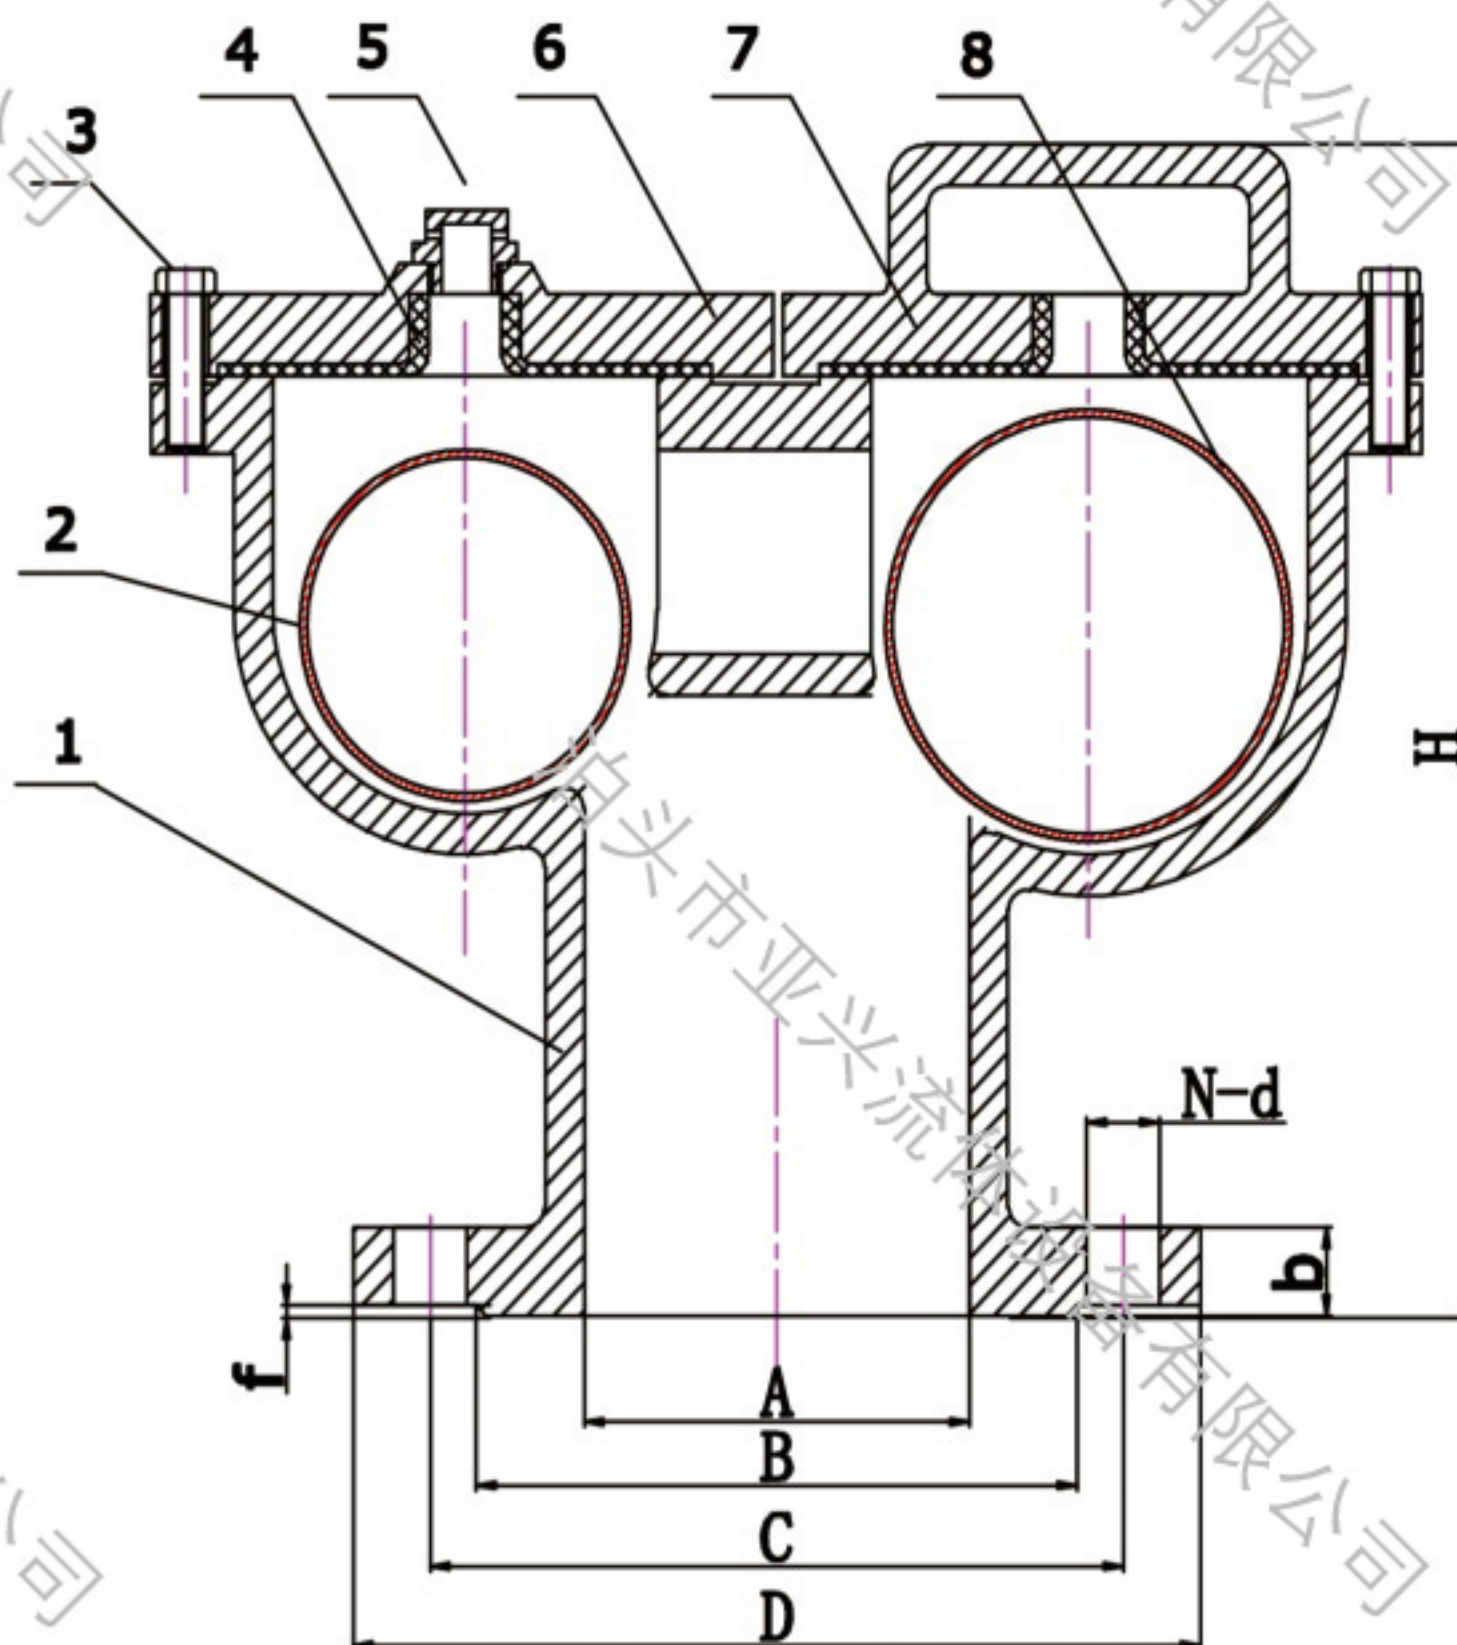

Part & Materials		
NO	Part	Material
1	Body	Ductile Iron GGG50
2	Ball	Stainless Steel
3	Bolts	A2-70
4	Gasket	NBR
5	Exhaust Bolt	SS304
6	Cover	Ductile Iron GGG50
7	Cover	Ductile Iron GGG50
8	Ball	Stainless Steel

Technical Data		
NO	Description	Specification
1	Nominal Dia	DN50-DN200
2	Nominal Pressure	PN10&PN16
3	Valve Design Standard	EN1074-4:2000
4	Flange Standard Conformity	EN1092-2
5	Expoxy Coating	Epoxy powder coating with minimum thickness of 250 microns inside and outside.
6	Working Temperature(Max)	80°C

DIMENSIONS (MM)

PN	A	D		C		B		n-d		b		f	H
		PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16	PN10	PN16		
DN50	50	165	185	125	145	99	119	4-19	4-19	19	19	3	200
DN65	65	185	200	145	160	119	133	4-19	8-19	19	19	3	200
DN80	80	200	220	160	180	133	154	8-19	8-19	19	19	3	250
DN100	100	220	240	180	210	154	210	8-19	8-23	19	19	3	260
DN150	150	285	310	240	266	210	266	8-23	12-23	19	20	3	310
DN200	150	340	360	295		266		8-23	12-23	20		3	310

Yaxing product specifications in this catalog are for reference only. Yaxing reserves the rights to change without prior notice.