


TRIPLE FUNCTION AIR VALVE DN40-DN300

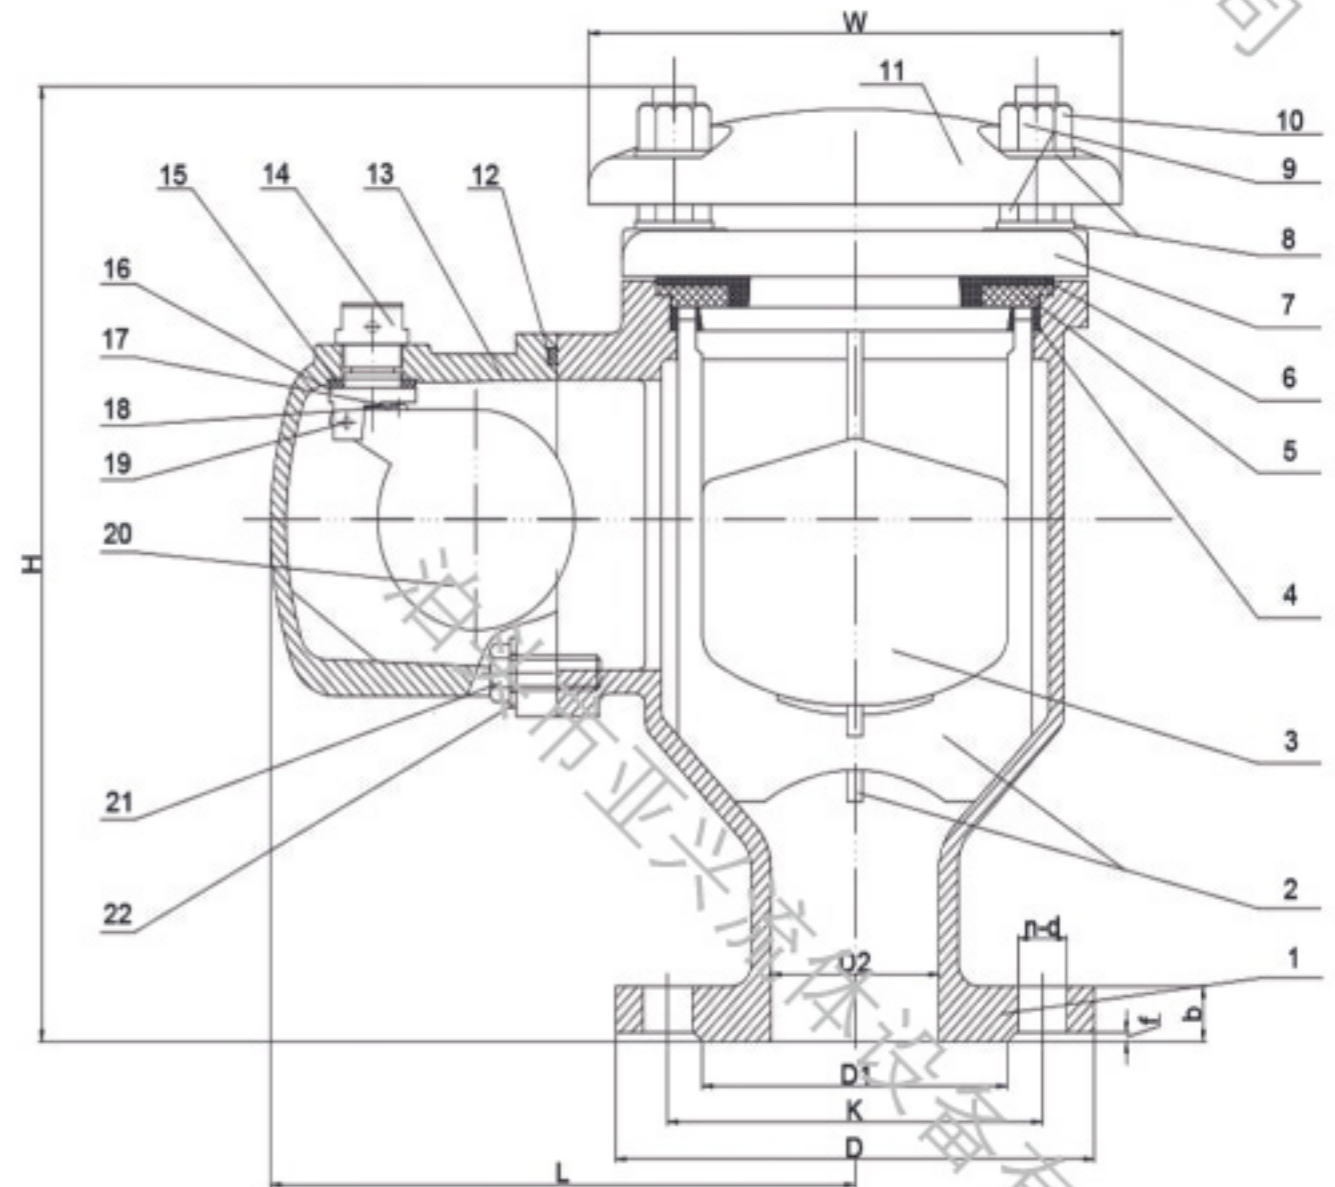

Part & Materials		
NO	Part	Material
1	Body	Ductile Iron GGG50
2	Ball Guide	SS304
3	Ball	SS304
4	Support	SS304
5	Seat Ring	EPDM
6	Seat Support	SS304
7	Cover	Ductile Iron GGG50
8	Washer	CS
9	Nut	CS
10	Hexagon Bolt	CS
11	Cowl	Ductile Iron GGG50
12	O-Ring	EPDM
13	Side Body	Stainless Steel
14	Cap	Brass
15	Gasket	EPDM
16	Bracket	Nylon
17	Adjusting Screw	Stainless Steel
18	Seat	EPDM
19	Hinge Pin	Stainless Steel
20	Side Float	SS304
21	Hexagon Bolt	CS
22	Washer	CS

Technical Data		
NO	Description	Specification
1	Nominal Dia	DN40-DN300
2	Nominal Pressure	PN10&PN16
3	Valve Design Standard	EN1074-4:2000
4	Flange Standard Conformity	EN1092-2
5	Expoxy Coating	Epoxy powder coating RAL5005 with minimum thickness of 250 microns inside and outside.
6	Working Temperature(Max)	80°C

DIMENSIONS (MM)

DN	L	H	D	K	D1	D2	n-d	b	f	W
DN40	232	329	150	110	84	40	4-19	19	3	206
DN50	232	329	165	125	99	50	4-19	19	3	206
DN40-65	232	329	185	110-145	118	50	4-19	19	3	206
DN65	232	329	185	145	118	65	4-19	19	3	206
DN80	232	329	200	160	132	80	8-19	19	3	206
DN100	238	413	220	180	156	100	8-19	19	3	280
DN150	238	413	285	240	211	150	8-23	19	3	280
DN200	238	413	340	295	266	150	12-23	20	3	280
DN250	238	413	405	355	319	150	12-28	22	3	280
DN300	238	413	460	410	370	150	12-28	24.5	4	280

Yaxing product specifications in this catalog are for reference only. Yaxing reserves the rights to change without prior notice.