


FLEXIBLE RUBBER JOINT DN40-DN1200

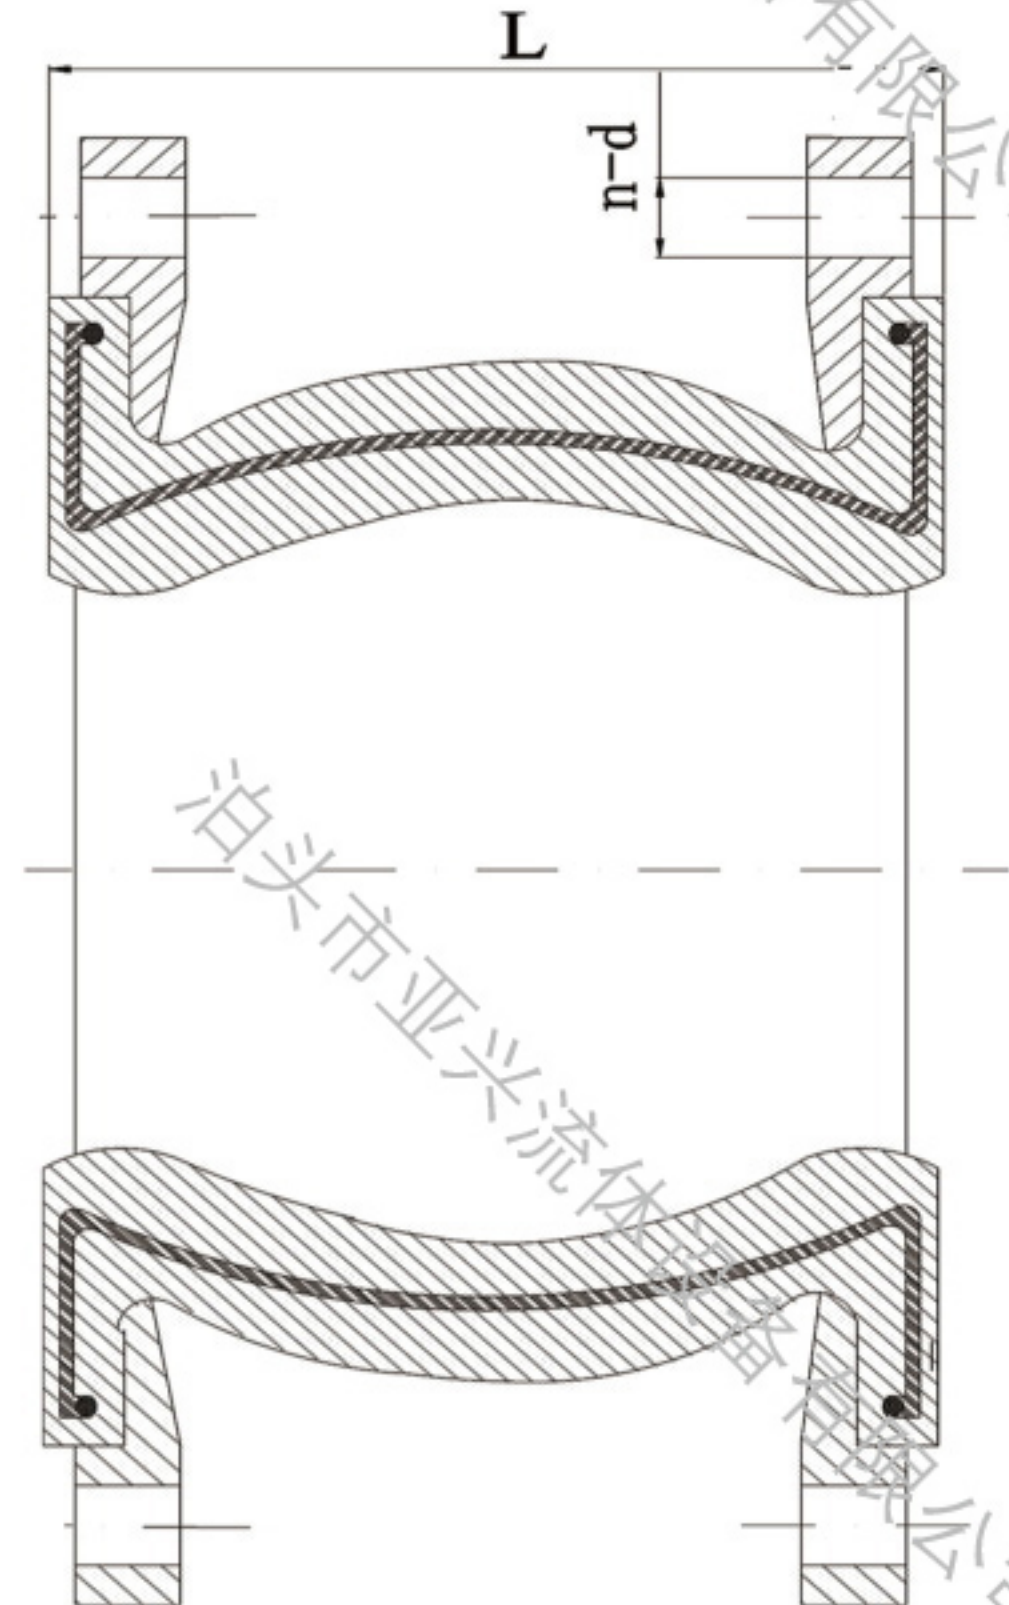

DIMENSIONS (MM)

DN	L	JIS 10K		
		D	PCD	n-d
DN40	95	140	105	4-19
DN50	105	155	120	4-19
DN65	115	175	140	4-19
DN80	135	185	150	8-19
DN100	150	210	175	8-19
DN125	165	250	210	8-23
DN150	180	280	240	8-23
DN200	210	330	290	12-23
DN250	230	400	355	12-25
DN300	245	445	400	16-25

Yaxing product specifications in this catalog are for reference only. Yaxing reserves the rights to change without prior notice.

Part & Materials

1	Flange	Galvanised Carbon Steel/Epoxy painted Cast Steel
2	Rubber Ball	EPDM/NBR

DIMENSIONS (MM)

DN	L	EN1092 PN10			EN1092 PN16		
		D	PCD	n-d	D	PCD	n-d
DN40	95	150	110	4-19	150	110	4-19
DN50	105	165	125	4-19	165	125	4-19
DN65	115	185	145	4-19	185	145	4-19
DN80	135	200	160	8-19	200	160	8-19
DN100	150	220	180	8-19	220	180	8-19
DN125	165	250	210	8-19	250	210	8-19
DN150	180	285	240	8-23	285	240	8-23
DN200	210	340	295	8-23	340	295	8-23
DN250	230	400	350	12-23	400	355	12-23
DN300	245	455	400	12-23	455	410	12-23
DN350	255	505	460	16-23	520	470	16-23
DN400	255	565	515	16-28	580	525	16-28
DN450	255	615	565	20-28	640	585	20-28
DN500	255	670	620	20-28	715	650	20-28
DN600	260	780	725	20-31	840	770	20-31
DN700	320	895	840	24-31	910	840	24-37
DN800	340	1010	950	24-34	1025	950	24-40
DN900	370	1115	1050	28-34	1125	1050	28-40
DN1000	400	1230	1160	28-37	1255	1170	28-43
DN1200	420	1455	1380	32-40	1485	1390	32-49

Yaxing product specifications in this catalog are for reference only. Yaxing reserves the rights to change without prior notice.